

SM10,AUS=W/410 Security fitting 351 - mushroom knob/handle

Door fittings

Security fittings without cylinder cover



IKON provides a broad selection of security fittings and escutcheons, with or without cylinder covers. The wide range of IKON fittings is suitable for house and apartment doors, interior and exterior doors and doors made of all conventional materials. It encompasses a variety of handle fittings, a broad range of anodised finishes and colours and a quality spectrum ranging from solid aluminium fittings to premium security steel fittings. Solid steel with drilling protection and internal screw fittings with high tensile resistance form a practically impervious shield for locking cylinders.


Area of Application

IKON security fittings with profile locking cylinder cut-out and without a cylinder cover ensure that mortise locks and locking cylinders are securely mounted on house and apartment entrance doors. They effectively resist intrusion attempts involving break-in or extraction of the cylinder. A locking cylinder with drilling protection should be utilised when employing security fittings without a cylinder cover.

IKON
ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

SM10,AUS=W/410 Security fitting 351 - mushroom knob/handle

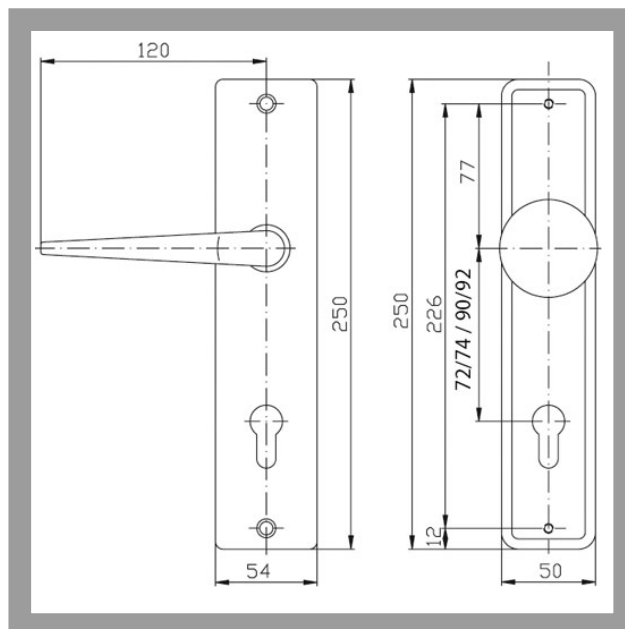

Product description

- With drilling protection plate effective protection against drilling of mortise lock
- Standard external backplate thickness 10mm (ZUE=10)
- Other external backplate thicknesses 12mm (ZUE=12), 15mm (ZUE=15), 20mm (ZUE=20)
- Execution prepared for round cylinder (VAR=RZ) is not available for external backplate thickness 12mm (ZUE=12)
- Standard version prepared for profile cylinder (VAR=PZ)
- Other executions prepared for round cylinder (VAR=RZ)
- Distance 72/74mm with 8mm square for apartment entrance doors (ABM=72/8) or (ABM=74/8)
- Distance 90/92mm with 10mm spindle for main entrance doors (ABM=90/10) or (ABM=92/10)
- Standard finish nickel silver (FB=F2)
- Alternative colours: silver (FB=F1) gold (FB=F3), Meta colour 1003 coated (FB=MC)
- Double screwed joint
- Available for standard room door thicknesses 38-42mm (TS=38-42) and standard house door thicknesses 48-52mm (TS=48-52), prepared for profile cylinder
- Material: aluminium

Accessories/Individual parts

- A-half spindle with M6-thread ZH 8 A 1M54
- Grub screw with hardened cone point ZH51 1M93

Compatible ASSA ABLOY products

- Double cylinder .551
- Double cylinder .531

Scope of delivery

- 1 Set with fixing material



SM10,AUS=W/410 Security fitting 351 - mushroom knob/handle

Article-No.	FB=	TS=	ABM=	VAR=	ZUE=
SM10 45753	F2	38-42	72/8	PZ	10
SM10 45757	F2	38-42	72/8	PZ	12
SM10 45761	F2	38-42	72/8	PZ	15
SM10 45902	F2	38-42	72/8	PZ	20
SM10 45765	F2	38-42	74/8	RZ	10
SM10 45768	F2	38-42	74/8	RZ	15
SM10 45905	F2	38-42	74/8	RZ	20
SM10 45834	F2	48-52	90/10	RZ	10
SM10 45837	F2	48-52	90/10	RZ	15
SM10 45919	F2	48-52	90/10	RZ	20
SM10 45822	F2	48-52	92/10	PZ	10
SM10 45826	F2	48-52	92/10	PZ	12
SM10 45830	F2	48-52	92/10	PZ	15
SM10 45916	F2	48-52	92/10	PZ	20
SM10 45752	F1	38-42	72/8	PZ	10
SM10 45756	F1	38-42	72/8	PZ	12
SM10 45760	F1	38-42	72/8	PZ	15
SM10 45901	F1	38-42	72/8	PZ	20
SM10 45764	F1	38-42	74/8	RZ	10
SM10 45767	F1	38-42	74/8	RZ	15
SM10 45904	F1	38-42	74/8	RZ	20
SM10 45833	F1	48-52	90/10	RZ	10
SM10 45836	F1	48-52	90/10	RZ	15
SM10 45918	F1	48-52	90/10	RZ	20
SM10 45821	F1	48-52	92/10	PZ	10
SM10 45825	F1	48-52	92/10	PZ	12
SM10 45829	F1	48-52	92/10	PZ	15
SM10 45915	F1	48-52	92/10	PZ	20
SM10 45754	F3	38-42	72/8	PZ	10
SM10 45758	F3	38-42	72/8	PZ	12



ASSA ABLOY
Sicherheitstechnik GmbH
Goerzallee 299
14167 Berlin
berlin@assaabloy.de
Tel. +4930 8106-0
Fax +4930 8106-26 00
www.assaabloy.de

ASSA ABLOY, the global leader
in door opening solutions

SM10,AUS=W/410 Security fitting 351 - mushroom knob/handle

Article-No.	FB=	TS=	ABM=	VAR=	ZUE=
SM10 45762	F3	38-42	72/8	PZ	15
SM10 45903	F3	38-42	72/8	PZ	20
SM10 45766	F3	38-42	74/8	RZ	10
SM10 45769	F3	38-42	74/8	RZ	15
SM10 45906	F3	38-42	74/8	RZ	20
SM10 45835	F3	48-52	90/10	RZ	10
SM10 45838	F3	48-52	90/10	RZ	15
SM10 45920	F3	48-52	90/10	RZ	20
SM10 45823	F3	48-52	92/10	PZ	10
SM10 45827	F3	48-52	92/10	PZ	12
SM10 45831	F3	48-52	92/10	PZ	15
SM10 45917	F3	48-52	92/10	PZ	20
SM10 45755	MC	38-42	72/8	PZ	10
SM10 45759	MC	38-42	72/8	PZ	12
SM10 45763	MC	38-42	72/8	PZ	15
SM10 45824	MC	48-52	92/10	PZ	10
SM10 45828	MC	48-52	92/10	PZ	12
SM10 45832	MC	48-52	92/10	PZ	15



ASSA ABLOY
Sicherheitstechnik GmbH
Goerzallee 299
14167 Berlin
berlin@assaabloy.de
Tel. +4930 8106-0
Fax +4930 8106-26 00
www.assaabloy.de

ASSA ABLOY, the global leader
in door opening solutions