

5551 Double cylinder - system TK5

Mechanical locking cylinders

Double cylinder

Closes on one side (A), dummy on other side (B)



Locking cylinders form the core element of secure locking systems and represent IKON's core competency. The product range meets challenging security requirements with sophisticated solutions. High-quality IKON locking cylinders provide high protection against intruders and a huge amount - related to the cylinder type - are certified to meet appropriate standards. Standard equipment in this respect includes anti-drilling devices, security cards and panic functions. Patented profiles are a direct result of decades of experience gained in precision engineering and are effectively equipped against even the latest intrusion or burglary techniques. These features include innovative VECTOR profiles and the IKON reversible key profile WSW-W10.

Area of Application


Double cylinders that can only be actuated from one side are generally used for entrance doors with a lower security requirement, or due to building conditions. IKON double cylinders are available in different lengths to meet the needs and requirements of every installation situation. There is a choice of different design variants. It goes without saying that you can also obtain several keyed alike locking cylinders, so that only one key is required for several doors.

IKON
ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

5551 Double cylinder - system TK5

Closes on one side (A), dummy on other side (B)

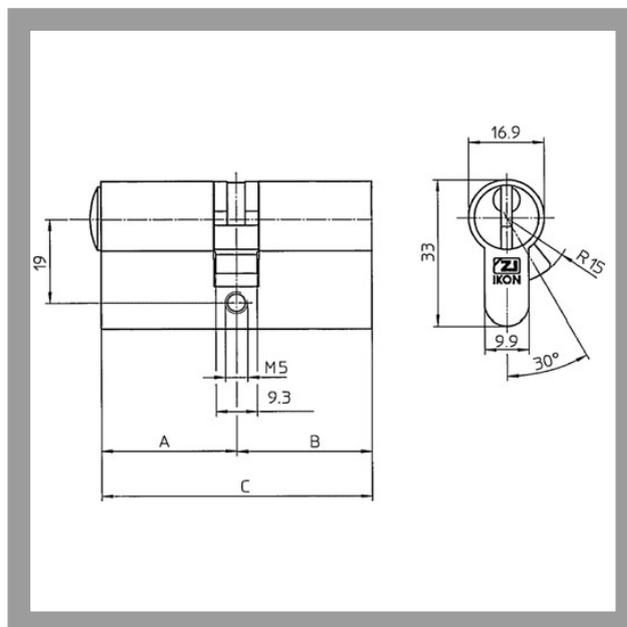

Product description

- 5 pin tumblers
- Brass cylinder
- Standard finish, satin nickel-plated (OF=MV)
- Other surfaces: brass, mat brushed (OF=MG), polished brass (OF=MP)
- Basic cylinder length 61mm (C) - A/B (L=30/30) other installation lengths available
- Standard cam position (SST=30°)
- Other cam positions (SST=2x45°, 8x45°, 360°)
- Pinion version option Mul-T-Lock, 24mm diameter, module 2, 10 teeth (SST=K901179)
- Pinion version option VIRO/IKON .138, 30mm diameter, module 1.5, 18 teeth (SST=K901180)
- Pinion version option Laperche, 24mm diameter, module 1.5, 14 teeth (SST=K901293)
- Pinion version option Italy Type, 27mm diameter, module 1.5, 16 teeth (SST=K901188)
- Drilling protection (AB=), emergency equipment (GE=), locking wave (SW=), additional lateral scanning, security card depending on profile (PR=)
- VdS class, RAL quality symbol, DIN class, depending on profile (PR=)
- Key with round metal head
- Spherical cylinder core head with reinforced key guide
- Cam made of break and corrosion-resistant nickel silver profile
- Core pins made of special wear-resistant bronze

Accessories/Individual parts

- Cylinder fixing screw 1149

Compatible ASSA ABLOY products

- Maintenance spray 8511

Scope of delivery

- 1 double cylinder
- 1 cylinder fixing screw M5 x 85mm

IKON
ASSA ABLOY

5551 Double cylinder - system TK5

Closes on one side (A), dummy on other side (B)

Current profiles for individual locking

Profile (PR=)	Standard profile N2.	Locking wave profile 2PE
Profile version	61	54
With security card	No	Yes
included		
Drilling protection (AB=)	Stahlstifte und Stahlkugeln	2
Emergency device (GE=)	optional	BS
Locking wave (SW=)	-	1
VdS class	-	Class B+
RAL quality symbol	-	Yes
DIN class	-	Class 82
Modular system (GBK=)	-	-
Additional lateral pins	-	4
Factory-keyed profile/Client profile	Factory-keyed profile	Factory-keyed profile
Key head shape	Round	Round



ASSA ABLOY
Sicherheitstechnik GmbH
Goerzallee 299
14167 Berlin
berlin@assaabloy.de
Tel. +4930 8106-0
Fax +4930 8106-26 00
www.assaabloy.de

ASSA ABLOY, the global leader
in door opening solutions