


# System SK6 - Multiprofile

Suitable for system types GH, H, KHZ, Z, ZUE

Mechanical locking cylinders

New profiles for locking systems

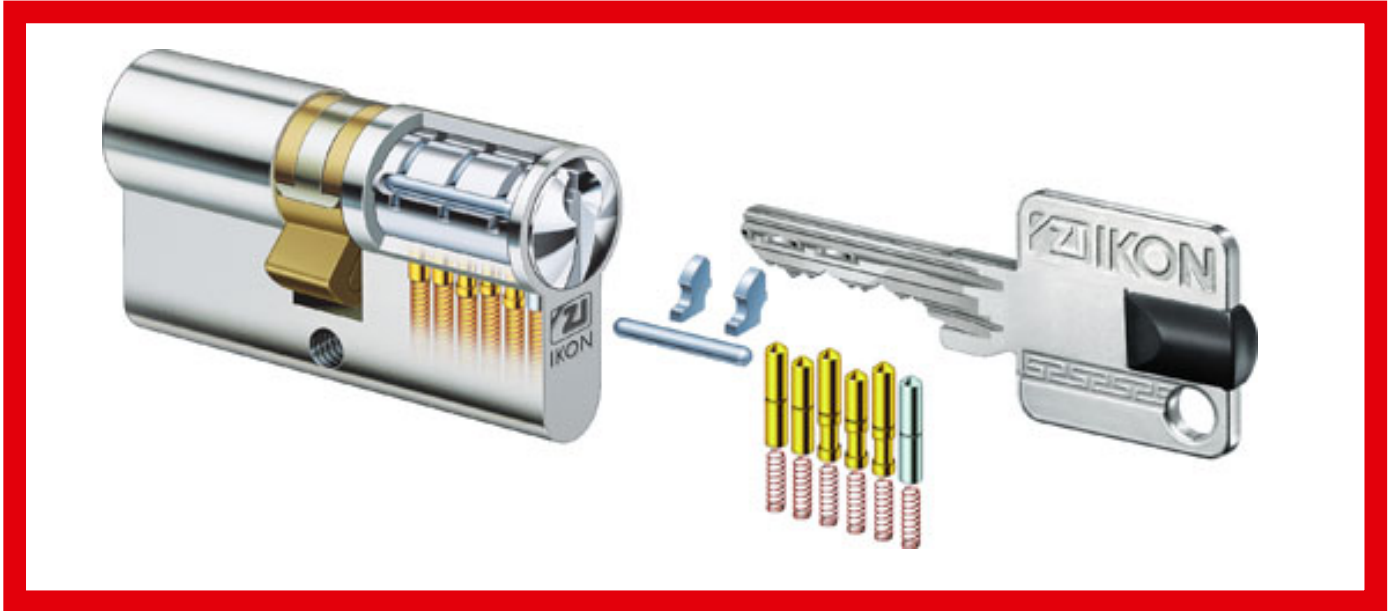

## Product description

- 6 (+2) spring loaded, active pin tumblers complying with DIN EN 1303 and/or DIN 18 252 = protection against unauthorised opening
- Paracentric key profiles with lunated undercuts, scanned by 2 blocking slide elements = unlocking security
- Protected key profile with security card = Key security
- DIN EN 1303, lock security class 6
- DIN EN 1303, intrusion resistance class 0, optionally available with drilling protection and extraction protection class 2
- Optional DIN testing, class 82, with drilling protection, optionally available with extraction protection
- Optional VdS approval, class B, with drilling protection, optionally available with extraction protection
- Special profile design, pin combination and additional side scanning provide a very high degree of protection against lock picking and "key bumping"
- Key with combined metal/plastic head, optionally available in the colours: black (standard colour), red, blue, yellow, green and grey

Premium-quality profile, special class SK6 with 6 active spring loaded pin tumblers. Lunated undercuts are milled into one or both long sides of the key. This coding is scanned in the locking cylinder by 2 special blocking slide elements (without springs). Missing undercuts on the key lead to blocking of the opening procedure. This type of lateral key profile scanning provides a considerably higher degree of protection against unauthorised opening and unlocking security when compared to conventional key profiles.

**ZIKON**  
**ASSA ABLOY**