

T010 Overhead door closer T243 with standard arm T400

Continuous closing force adjustment
range EN 2-6

Door closers

Door closer sets



IKON door closers are distinguished by their uniform appearance and the identical dimensions of model series T240 and T250. Uniform fixing points ensure that a firm mounting is achieved outside the frame rebate (even without a mounting plate). The 14 mm height adjustment between the lock body and standard arm is achieved by varying the height of the closer axis. Temperature stability is another highlight of the IKON door closer: high-quality valves and hydraulic fluid achieve maximum locking stability. A high degree of user comfort, as all settings can be adjusted from the front.

Area of Application


This IKON door closer is suitable for internal and external DIN L/R rebated doors that are subject to extreme stress. Standard installation is on the hinge side and overhead installation on the side opposite the hinges. The door closer is suitable for leaf widths up to max. 1,400mm and operates within a temperature range of -25° to +45°. Use on fire and smoke protection doors is only permitted in conjunction with a mounting plate.


ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

T010 Overhead door closer T243 with standard arm T400

Continuous closing force adjustment
range EN 2-6

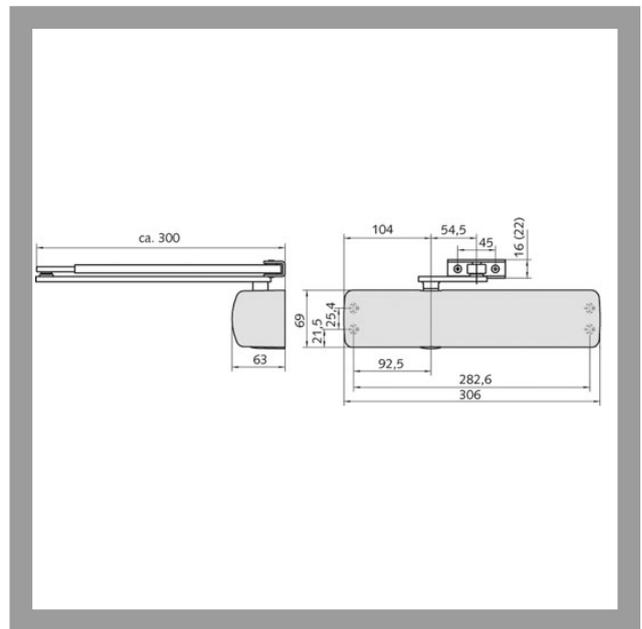

Product description

- Thermodynamic valves ensure consistent closing speed, latching force and backcheck across the entire temperature range from -25°C to +45°C
- 14mm continuous height adjustment between door closer and standard arm
- Standard arm T400: optimum closing force, enables opening of door up to max.180° (depending on door design)
- Standard arm T400,AUS=SPEZIAL: as version standard, however with inseparable tamper-proof ball joint
- Hydraulic latching force, backcheck and closing speed continuously adjustable from outset
- Effective ranges adjustable for backcheck and latching force
- Cast aluminium door closer body
- Modern design
- Universally suitable and removable cover made of high-quality plastic
- Standard finish silver, resembling to RAL 9006 (FB=SGR)
- Other colours: white, similar to RAL 9016 (FB=WS) and RAL colours of your choice
- Tested in accordance with EN 1154

Accessories/Individual parts

- Lintel bracket T103
- Mounting plate T106
- Cover T107

Scope of delivery

- 1 Overhead door closer T243
- 1 standard arm T400
- 1 drilling template
- fixing material

ZI IKON
ASSA ABLOY

T010 Overhead door closer T243 with standard arm T400

Continuous closing force adjustment
range EN 2-6

Article-No.	FB=	AUS=	Artikel-Nr. Tuerschliesser=	Artikel-Nr. Armsystem=
T010 43352	SGR	STANDARD	T243 41227	T400 41241
T010 43353	WS	STANDARD	T243 41226	T400 41240
T010 43354	BN	STANDARD	T243 41666	T400 41669
T010 R0001	RAL XXXX	STANDARD	T243 R0001	T400 R0001
T010 43357	SGR	SPEZIAL	T243 41227	T400 41243
T010 43358	WS	SPEZIAL	T243 41226	T400 41242
T010 43359	BN	SPEZIAL	T243 41666	T400 41670
T010 R0002	RAL XXXX	SPEZIAL	T243 R0001	T400 R0002



ASSA ABLOY
Sicherheitstechnik GmbH
Goerzallee 299
14167 Berlin
berlin@assaabloy.de
Tel. +4930 8106-0
Fax +4930 8106-26 00
www.assaabloy.de

ASSA ABLOY, the global leader
in door opening solutions