

# T011 Overhead door closer T243 with closing delay and standard arm T400

Door closers

Door closer sets

Continuous closing force adjustment  
range EN 2-6 - with closing delay



IKON door closers are distinguished by their uniform appearance and the identical dimensions of model series T240 and T250. Uniform fixing points ensure that a firm mounting is achieved outside the frame rebate (even without a mounting plate). The 14 mm height adjustment between the lock body and standard arm is achieved by varying the height of the closer axis. Temperature stability is another highlight of the IKON door closer: high-quality valves and hydraulic fluid achieve maximum locking stability. A high degree of user comfort, as all settings can be adjusted from the front.

### Area of Application


This IKON door closer is suitable for internal and external DIN L/R single action doors that are subject to extreme stress. Normal mounting is realised on the hinge side, with head mounting possible on the side opposite the hinges. The door closer is suitable for leaf widths up to max. 1400 mm and operates within a temperature range of -25° to +45°.

  
**ASSA ABLOY**

ASSA ABLOY, the global leader  
in door opening solutions

# T011 Overhead door closer T243 with closing delay and standard arm T400

Continuous closing force adjustment  
range EN 2-6 - with closing delay

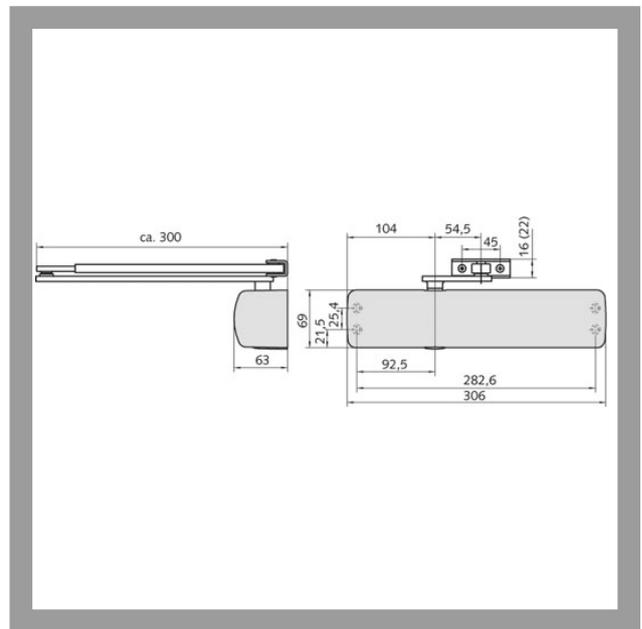

## Product description

- Thermodynamic valves ensure consistent closing speed, latching force, backcheck and closing delay across entire temperature range from -25°C to +45°C
- 14mm continuous height adjustment between door closer and standard arm
- Standard arm T400: optimum closing force, enables opening of door up to max.180° (depending on door design)
- Standard arm T400,AUS=SPEZIAL: as version standard, however with inseparable tamper-proof ball joint
- Hydraulic latching force, backcheck and closing speed continuously adjustable from outset
- Closing delay (SVZ=DC) also adjustable from the front (not approved for use on fire doors)
- Effective ranges for backcheck, closing delay and latching force are adjustable
- Cast aluminium door closer body
- Modern design
- Universally suitable and removable cover made of high-quality plastic
- Standard finish silver, resembling to RAL 9006 (FB=SGR)
- Other colours: white, similar to RAL 9016 (FB=WS) and RAL colours of your choice

## Accessories/Individual parts

- Lintel bracket T103
- Mounting plate T106
- Cover T107

## Scope of delivery

- 1 overhead door closer T243 with closing delay
- 1 standard arm T400
- 1 drilling template
- fixing material

**ZI IKON**  
**ASSA ABLOY**

# T011 Overhead door closer T243 with closing delay and standard arm T400

Continuous closing force adjustment  
range EN 2-6 - with closing delay

Article-No.	FB=	SVZ=	AUS=	Artikel-Nr. Tuerschliesser=	Artikel-Nr. Armsystem=
<b>T011 43362</b>	SGR	DC	STANDARD	T243 41231	T400 41241
<b>T011 43363</b>	WS	DC	STANDARD	T243 41230	T400 41240
<b>T011 43364</b>	BN	DC	STANDARD	T243 43319	T400 41669
<b>T011 R0001</b>	RAL XXXX	DC	STANDARD	T243 R0002	T400 R0001
<b>T011 43367</b>	SGR	DC	SPEZIAL	T243 41231	T400 41243
<b>T011 43368</b>	WS	DC	SPEZIAL	T243 41230	T400 41242
<b>T011 43369</b>	BN	DC	SPEZIAL	T243 43319	T400 41670
<b>T011 R0002</b>	RAL XXXX	DC	SPEZIAL	T243 R0002	T400 R0002



ASSA ABLOY  
Sicherheitstechnik GmbH  
Goerzallee 299  
14167 Berlin  
berlin@assaabloy.de  
Tel. +4930 8106-0  
Fax +4930 8106-26 00  
www.assaabloy.de

ASSA ABLOY, the global leader  
in door opening solutions