


T018 Overhead door closer T243 with sliding rail T461

Continuous closing force adjustment
range EN 1-4

Door closers

Door closer sets

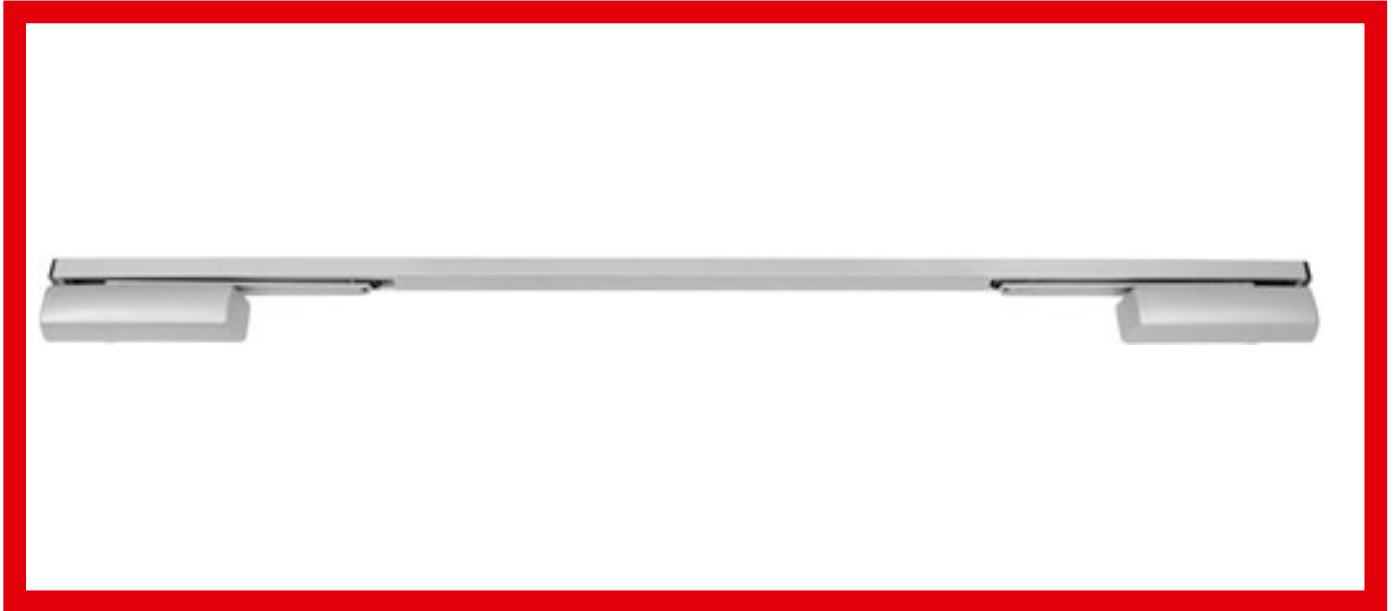

IKON door closers are distinguished by their uniform appearance and the identical dimensions of model series T240 and T250. Uniform fixing points ensure that a firm mounting is achieved outside the frame rebate (even without a mounting plate). The 14 mm height adjustment between the lock body and standard arm is achieved by varying the height of the closer axis. Temperature stability is another highlight of the IKON door closer: high-quality valves and hydraulic fluid achieve maximum locking stability. A high degree of user comfort, as all settings can be adjusted from the front.

Area of Application

This IKON door closer is suitable for internal and external double-leaf rebated doors. It is mounted on the hinge side. The door closer is suitable for leaf widths up to max. 1100mm and hinge spacing of up to 2200mm and operates within a temperature range of -25° to +45°. It can also be mounted on asymmetrically-divided double-leaf doors with a minimum width of 400mm. Use on fire and smoke protection doors is only permitted in conjunction with a mounting plate.


 **IKON**

ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

T018 Overhead door closer T243 with sliding rail T461

Continuous closing force adjustment
range EN 1-4

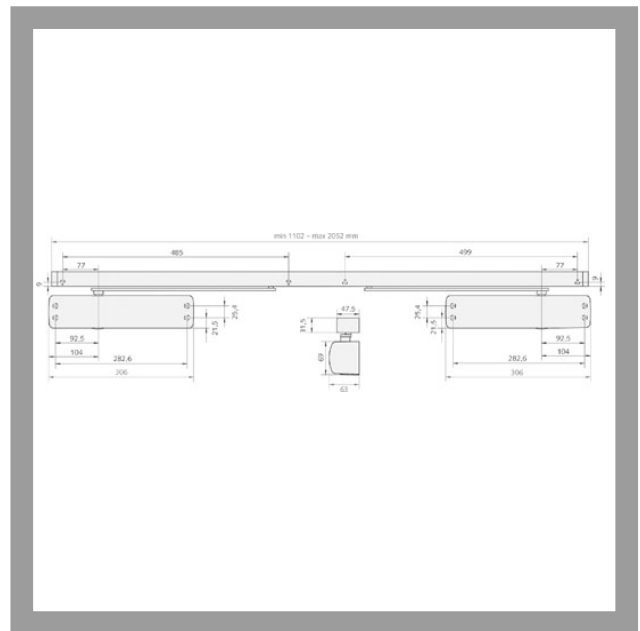

Product description

- Thermodynamic valves ensure consistent closing speed, latching force and backcheck across the entire temperature range from -25°C to +45°C
- 14mm continuous height adjustment between door closer and sliding rail
- Continuous sliding rail system with concealed integrated door selector, maximum opening angle: 180°, limitation necessary, e.g. door stop
- Hydraulic latching force, backcheck and closing speed continuously adjustable from outset
- Effective ranges adjustable for backcheck and latching force
- Cast aluminium door closer body
- Modern design
- Universally suitable and removable cover made of high-quality plastic
- Standard finish silver, resembling to RAL 9006 (FB=SGR)
- Other colours: white, similar to RAL 9016 (FB=WS) and RAL colours of your choice
- Tested in accordance with EN 1154, EN 1158

Accessories/Individual parts

- Mounting plate T106
- Cover T107
- Hinged cam T108

Scope of delivery

- 2 overhead door closer T243
- 1 sliding rail T461
- 1 drilling template
- fixing material

ZI IKON
ASSA ABLOY

T018 Overhead door closer T243 with sliding rail T461

Continuous closing force adjustment
range EN 1-4

Article-No.	FB=	Artikel-Nr. Tuerschliesser=	Artikel-Nr. Armsystem=
T018 43397	SGR	T243 41227	T461 41259
T018 43398	WS	T243 41226	T461 41258
T018 R0001	RAL XXXX	T243 R0001	T461 R0001



ASSA ABLOY
Sicherheitstechnik GmbH
Goerzallee 299
14167 Berlin
berlin@assaabloy.de
Tel. +4930 8106-0
Fax +4930 8106-26 00
www.assaabloy.de

ASSA ABLOY, the global leader
in door opening solutions