


# T019 Overhead door closer T243 with sliding rail T461

Continuous closing force adjustment  
range EN 1-4 - with closing delay

Door closers

Door closer sets

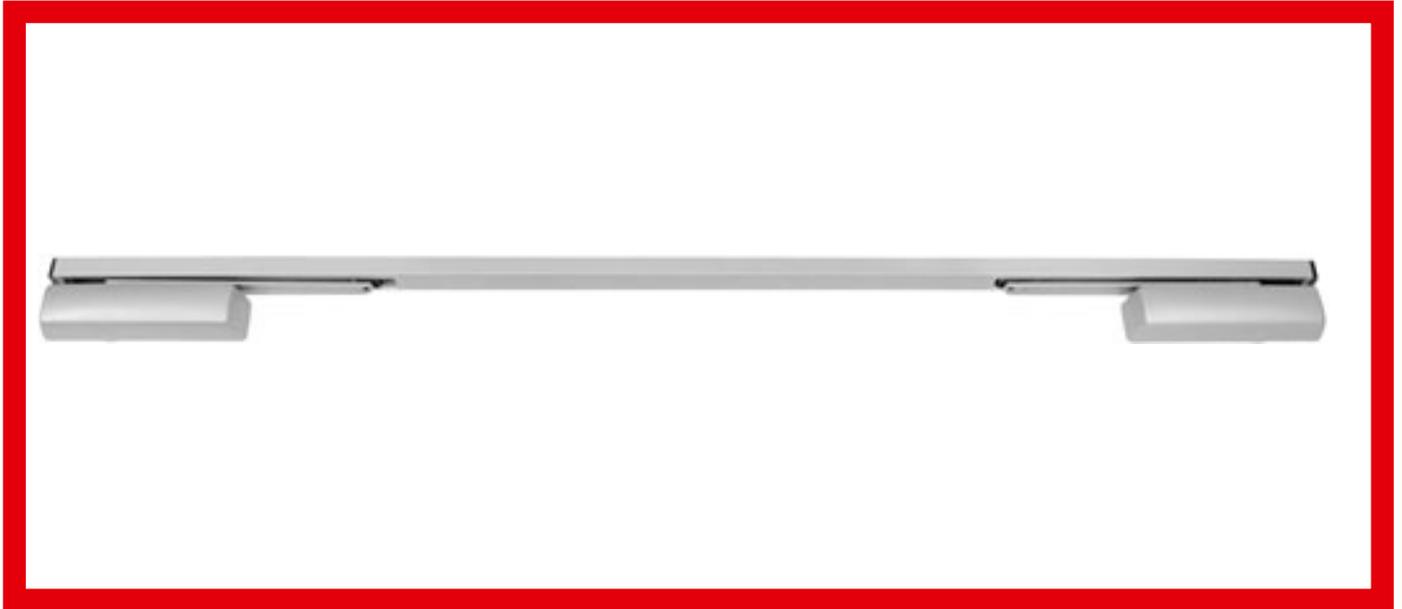

IKON door closers are distinguished by their uniform appearance and the identical dimensions of model series T240 and T250. The concealed fixture of the sliding rail is an aesthetic enhancement of the IKON door closer design. Uniform fixing points ensure that a firm mounting is achieved outside the frame rebate (even without a mounting plate).

The 14 mm height adjustment between the lock body and sliding rail is achieved by means of closer axis with variable height. The operating temperature range of the IKON door closer is yet another highlight: high-quality valves and hydraulic fluid achieve maximum locking stability. A high degree of user comfort, as all settings can be adjusted from the front. The door selector's solid design ensures a secure locking procedure even under unfavourable conditions.

## Area of Application


This IKON door closer is suitable for internal and external double-leaf rebated doors. It is mounted on the hinge side. The door closer is suitable for leaf widths up to max. 1100mm and hinge spacing of up to 2200mm and operates within a temperature range of -25° to +45°. It can also be mounted on asymmetrically-divided double-leaf doors with a minimum width of 400mm.

  
**ASSA ABLOY**

ASSA ABLOY, the global leader  
in door opening solutions

# T019 Overhead door closer T243 with sliding rail T461

Continuous closing force adjustment  
range EN 1-4 - with closing delay

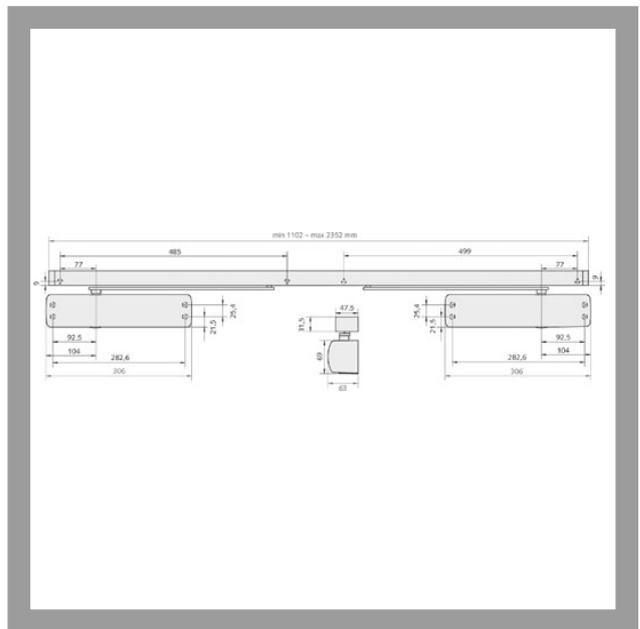

## Product description

- Thermodynamic valves ensure consistent closing speed, latching force, backcheck and closing delay across entire temperature range from -25°C to +45°C
- 14mm continuous height adjustment between door closer and sliding rail
- Continuous sliding rail system with concealed integrated door selector, maximum opening angle: 180°, limitation necessary, e.g. door stop
- Hydraulic latching force, backcheck and closing speed continuously adjustable from outset
- Closing delay (SVZ=DC) also adjustable from the front (not approved for use on fire doors)
- Effective ranges for backcheck, closing delay and latching force are adjustable
- Cast aluminium door closer body
- Modern design
- Universally suitable and removable cover made of high-quality plastic
- Standard finish silver, resembling to RAL 9006 (FB=SGR)
- Other colours: white, similar to RAL 9016 (FB=WS) and RAL colours of your choice

## Accessories/Individual parts

- Mounting plate T106
- Cover T107
- Hinged cam T108

## Scope of delivery

- 2 overhead door closer T243 with closing delay
- 1 sliding rail T461
- 1 drilling template
- fixing material

**ZIKON**  
**ASSA ABLOY**

# T019 Overhead door closer T243 with sliding rail T461

Continuous closing force adjustment  
range EN 1-4 - with closing delay

Article-No.	FB=	SVZ=	Artikel-Nr. Tuerschliesser=	Artikel-Nr. Armsystem=
<b>T019 43401</b>	SGR	DC	T243 41231	T461 41259
<b>T019 43402</b>	WS	DC	T243 41230	T461 41258
<b>T019 R0001</b>	RAL XXXX	DC	T243 R0002	T461 R0001



ASSA ABLOY  
Sicherheitstechnik GmbH  
Goerzallee 299  
14167 Berlin  
berlin@assaabloy.de  
Tel. +4930 8106-0  
Fax +4930 8106-26 00  
www.assaabloy.de

ASSA ABLOY, the global leader  
in door opening solutions