

T024 Overhead door closer T241 with standard arm T400

Continuous closing force adjustment
range EN 1-5

Door closers

Door closer sets



IKON door closers are distinguished by their uniform appearance and the identical dimensions of model series T240 and T250. Uniform fixing points ensure that a firm mounting is achieved outside the frame rebate (even without a mounting plate). The 14 mm height adjustment between the closer body and standard arm is achieved by closer axis with variable height. The operating temperature range of the IKON door closer is yet another highlight: high-quality valves and hydraulic fluid achieve maximum locking stability. A high degree of user comfort, as all settings can be adjusted from the front.

Area of Application


This IKON door closer is suitable for internal and external DIN L/R rebated doors. It can be installed on the hinge side (standard installation) or on the door leaf on the side opposite the hinges. The door closer is suitable for leaf widths up to max. 1,250mm and operates within a temperature range of -25° to +45°. Use on fire and smoke protection doors is only permitted in conjunction with a mounting plate.


ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

T024 Overhead door closer T241 with standard arm T400

Continuous closing force adjustment
range EN 1-5

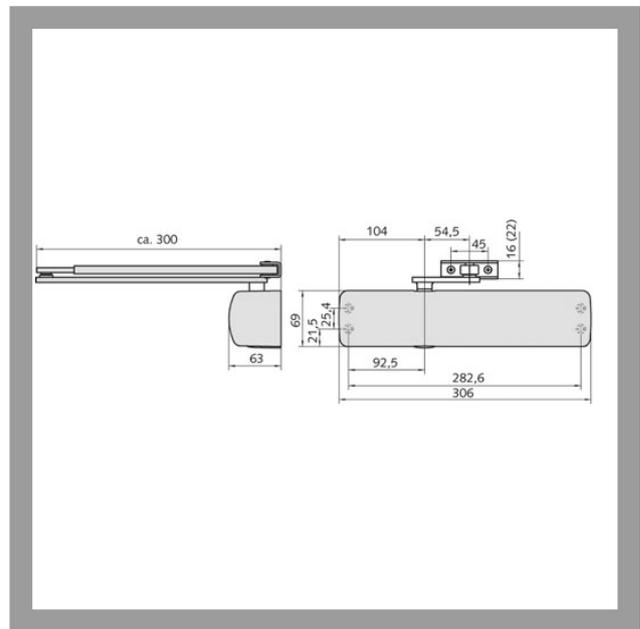

Product description

- Thermodynamic valves ensure consistent closing speed, latching force and backcheck across the entire temperature range from -25°C to +45°C
- 14mm continuous height adjustment between door closer and standard arm
- Standard arm T400: optimum closing force, enables opening of door up to max.180° (depending on door design)
- Standard arm T400,AUS=SPEZIAL: as version standard, however with inseparable tamper-proof ball joint
- Hydraulic latching force and closing speed continuously adjustable from front
- Adjustable latching force range
- Cast aluminium door closer body
- Modern design
- Universally suitable and removable cover made of high-quality plastic
- Standard finish silver, resembling to RAL 9006 (FB=SGR)
- Other colours: white, similar to RAL 9016 (FB=WS) and RAL colours of your choice
- Tested in accordance with EN 1154

Accessories/Individual parts

- Lintel bracket T103
- Mounting plate T106
- Cover T107

Scope of delivery

- 1 overhead door closer T241
- 1 standard arm T400
- 1 drilling template
- fixing material

ZI IKON
ASSA ABLOY

T024 Overhead door closer T241 with standard arm T400

Continuous closing force adjustment
range EN 1-5

Article-No.	FB=	AUS=	Artikel-Nr. Tuerschliesser=	Artikel-Nr. Armsystem=
T024 43417	SGR	STANDARD	T241 41223	T400 41241
T024 43418	WS	STANDARD	T241 41222	T400 41240
T024 43419	BN	STANDARD	T241 41665	T400 41669
T024 R0001	RAL XXXX	STANDARD	T241 R0001	T400 R0001
T024 43422	SGR	SPEZIAL	T241 41223	T400 41243
T024 43423	WS	SPEZIAL	T241 41222	T400 41242
T024 43424	BN	SPEZIAL	T241 41665	T400 41670
T024 R0002	RAL XXXX	SPEZIAL	T241 R0002	T400 R0002



ASSA ABLOY
Sicherheitstechnik GmbH
Goerzallee 299
14167 Berlin
berlin@assaabloy.de
Tel. +4930 8106-0
Fax +4930 8106-26 00
www.assaabloy.de

ASSA ABLOY, the global leader
in door opening solutions