


T461 Sliding rail

Door closers

Arm systems and sliding rails

Tested in accordance with EN 1158

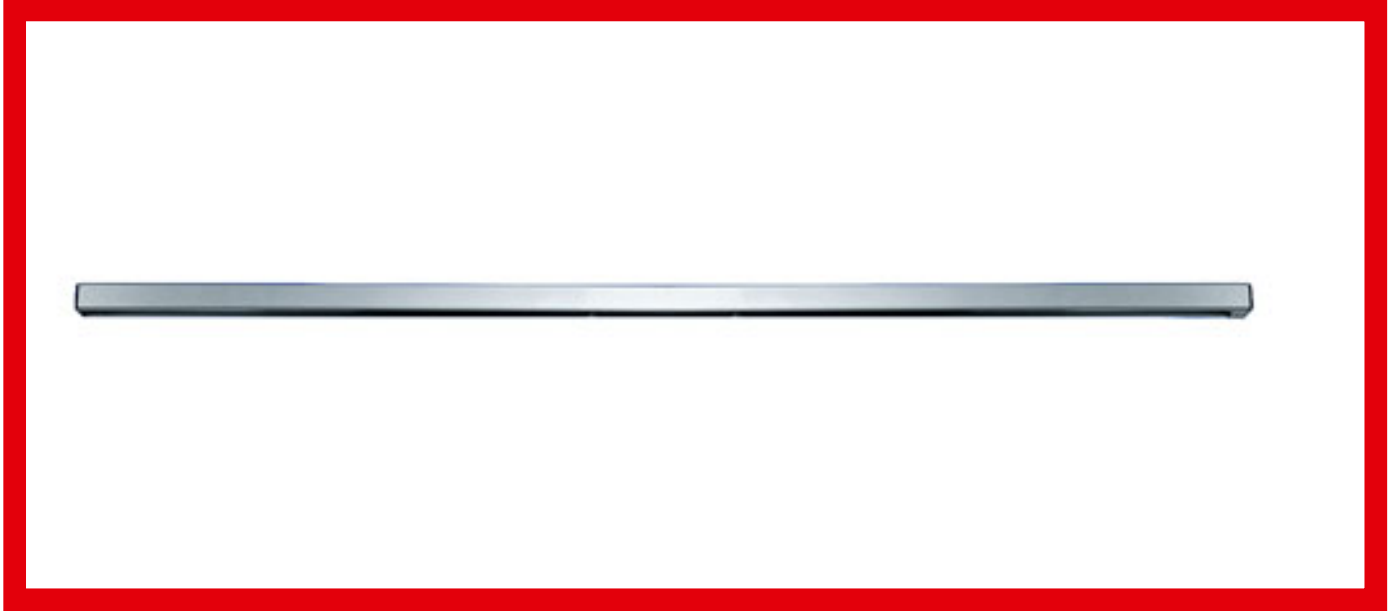

IKON provides a wide range of accessories and spare parts. Please note that the overall quality of IKON products can only be ensured if suitable original components are used.

Area of Application


This IKON sliding rail with integrated door selector is suitable for IKON T243 and T250 door closers. The sliding rail is suitable for use with double-leaf doors with a maximum door leaf width of 1250 mm and a maximum hinge spacing of maximum 2500 mm, depending on the door closer model employed. The sliding rail can also be used on asymmetrically-divided double-leaf doors with a minimum width of 400mm.

 **IKON**
ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

T461 Sliding rail

Tested in accordance with EN 1158

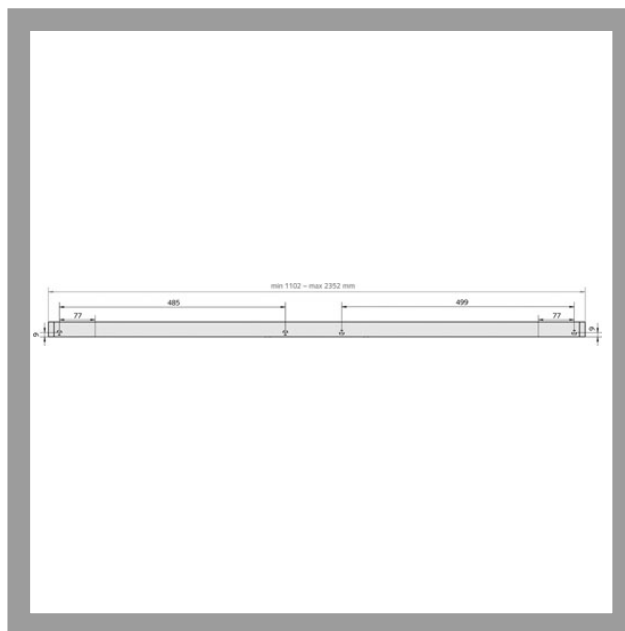

Product description

- Suitable for fire-rated and smoke protection doors
- Suitable for double-leaf doors, with integrated door selector
- Tested in combination with IKON overhead door closers T243 and T250 in accordance with EN 1158
- Standard finish silver, resembling to RAL 9006 (FB=SGR)
- Other colours: white, similar to RAL 9016 (FB=WS) and RAL colours of your choice
- Material: steel/aluminium

Compatible ASSA ABLOY products

- Door closers T243
- Door closers T250

Scope of delivery

- 1 sliding rail T461



T461 Sliding rail

Tested in accordance with EN 1158

Article-No.	FB=
T461 41259	SGR
T461 41258	WS
T461 R0001	RAL XXXX

ASSA ABLOY
Sicherheitstechnik GmbH
Goerzallee 299
14167 Berlin
berlin@assaabloy.de
Tel. +4930 8106-0
Fax +4930 8106-26 00
www.assaabloy.de



ASSA ABLOY, the global leader
in door opening solutions