

# W531 Double cylinder - system WSW

Mechanical locking cylinders

Double cylinder

Closes on both sides



Locking cylinders form the core element of secure locking systems and represent IKON's core competency. The product range meets challenging security requirements with sophisticated solutions. High-quality IKON locking cylinders provide high protection against intruders and a huge amount - related to the cylinder type - are certified to meet appropriate standards. Standard equipment in this respect includes anti-drilling devices, security cards and panic functions. Patented profiles are a direct result of decades of experience gained in precision engineering and are effectively equipped against even the latest intrusion or burglary techniques. These features include innovative VECTOR profiles and the IKON reversible key profile WSW-W10.

## Area of Application


Double cylinders are generally used in conjunction with mortise locks and door fittings in main entrance, apartment and other entrance doors. IKON double cylinders IKON are available in different lengths to meet the needs and requirements of every installation situation. It is also possible to choose from different versions (e.g. drilling protection or emergency exit devices). It goes without saying that you can also obtain several keyed alike locking cylinders, so that only one key is required for several doors.

**IKON**  
ASSA ABLOY

ASSA ABLOY, the global leader  
in door opening solutions

# W531 Double cylinder - system WSW

Closes on both sides

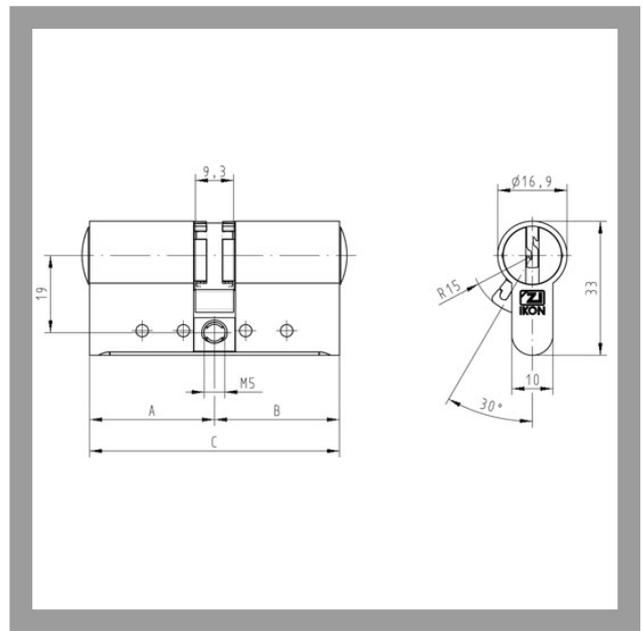

## Product description

- 11 pin tumblers
- Brass cylinder
- Standard finish, satin nickel-plated (OF=MV)
- Other surfaces: brass, mat brushed (OF=MG), polished brass (OF=MP)
- Basic cylinder length 61mm (C) - A/B (L=30/30) other installation lengths available
- Modular system for quick and simple length adjustment
- Pinion version option Mul-T-Lock, 24mm diameter, module 2, 10 teeth (SST=K901179)
- Pinion version option VIRO/IKON .138, 30mm diameter, module 1.5, 18 teeth (SST=K901180)
- Pinion version option Laperche, 24mm diameter, module 1.5, 14 teeth (SST=K901293)
- Pinion version option Italy Type, 27mm diameter, module 1.5, 16 teeth (SST=K901188)
- Available for stand-alone locks
- Drilling protection 2 (AB=2), additional lateral scanning, with security card
- Certified and marking according to VdS B, DIN class 82 and RAL as standard
- Oval key head shape
- Spherical cylinder core head with reinforced key guide
- Cam made of break and corrosion-resistant nickel silver profile
- Core pins made of special wear-resistant bronze

## Accessories/Individual parts

- Cylinder fixing screw 1149

## Compatible ASSA ABLOY products

- Maintenance spray 8511
- Protector bar DRS 8444
- Protector bar DRS 8443
- Protector bar DRS 8446
- Protector bar DRS 8447
- Protector bar DRS 8449
- Protector bar DRS 8448
- Escutcheon with rain protection cover 1279
- Escutcheon with rain protection cover and toggle lock 1288
- Garage rod lock standard package 9M31

## Scope of delivery

- 1 double cylinder
- 3 nickel silver keys
- 1 cylinder fixing screw M5 x 85mm

**IKON**  
**ASSA ABLOY**

# W531 Double cylinder - system WSW

Closes on both sides

Current profiles for individual locking

Profile (PR=)	Reversible key profile W10
Profile version	67
With security card	Yes
<b>included</b>	
Drilling protection (AB=)	2
Emergency device (GE=)	BS
Locking wave (SW=)	-
VdS class	Class B+
RAL quality symbol	Yes
DIN class	Class 82
<b>Modular system (GBK=)</b>	Yes
<b>Additional lateral pins</b>	5
<b>Factory-keyed profile/Client profile</b>	Factory-keyed profile
<b>Key head shape</b>	Round



ASSA ABLOY  
Sicherheitstechnik GmbH  
Goerzallee 299  
14167 Berlin  
berlin@assaabloy.de  
Tel. +4930 8106-0  
Fax +4930 8106-26 00  
www.assaabloy.de

ASSA ABLOY, the global leader  
in door opening solutions