

# T012 Overhead door closer T241 with hold- open arm T401

Door closers

Door closer sets

Continuous closing force adjustment  
range EN 2-6



IKON door closers are distinguished by their uniform appearance and the identical dimensions of model series T240 and T250 a. Uniform fixing points ensure that a firm mounting is achieved outside the fraem rebate (even without a mounting plate). The 14 mm height adjustment between the closer body and sliding rail is achieved by means of closer axis with variable height. The operating temperature range of the IKON door closer is yet another highlight: high-quality valves and hydraulic fluid achieve maximum locking stability. A high degree of user comfort, as all settings can be adjusted from the front.

#### Area of Application


This IKON door closer is suitable for internal and external DIN L/R single action doors that should be held open at times and are subject to extreme pressure and stress. Standard installation on the hinge side and overhead mounting on the side opposite the hinges. The door closer is suitable for leaf widths up to max. 1400 mm and operates within a temperature range of -25° to +45°.

  
**ASSA ABLOY**

ASSA ABLOY, the global leader  
in door opening solutions

# T012 Overhead door closer T241 with hold- open arm T401

Continuous closing force adjustment  
range EN 2-6

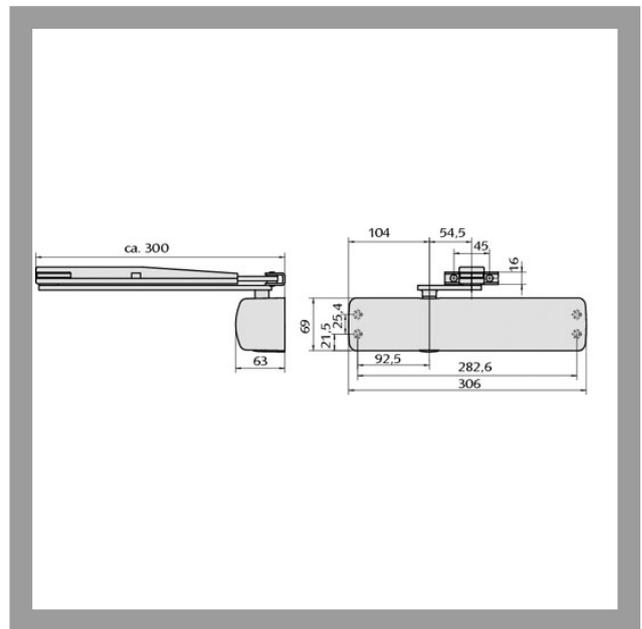

## Product description

- Thermodynamic valves ensure consistent closing speed, latching force and backcheck across the entire temperature range from -25°C to +45°C
- 14mm continuous height adjustment between door closer and hold-open arm
- Mechanical hold-open function with on/off option integrated in arm system, hold-open bracket continuously adjustable up to max.150°
- Hydraulic latching force, backcheck and closing speed continuously adjustable from outset
- Effective ranges adjustable for backcheck and latching force
- Cast aluminium door closer body
- Modern design
- Universally suitable and removable cover made of high-quality plastic
- Standard finish silver, resembling to RAL 9006 (FB=SGR)
- Other colours: white, similar to RAL 9016 (FB=WS) and RAL colours of your choice

## Accessories/Individual parts

- Lintel bracket T103
- Mounting plate T106
- Cover T107

## Scope of delivery

- 1 Overhead door closer T243
- 1 hold-open arm T401
- 1 drilling template
- fixing material

**ZIKON**  
**ASSA ABLOY**

# T012 Overhead door closer T241 with hold- open arm T401

Continuous closing force adjustment  
range EN 2-6

Article-No.	FB=	Artikel-Nr. Tuerschliesser=	Artikel-Nr. Armsystem=
<b>T012 43372</b>	SGR	T243 41227	T401 41247
<b>T012 43373</b>	WS	T243 41226	T401 41246
<b>T012 43374</b>	BN	T243 41666	T401 41672
<b>T012 R0001</b>	RAL XXXX	T243 R0001	T401 R0001



ASSA ABLOY  
Sicherheitstechnik GmbH  
Goerzallee 299  
14167 Berlin  
berlin@assaabloy.de  
Tel. +4930 8106-0  
Fax +4930 8106-26 00  
www.assaabloy.de

ASSA ABLOY, the global leader  
in door opening solutions