

T013 Overhead door closer T241 with hold- open arm T401

Door closers

Door closer sets

Continuous closing force adjustment
range EN 2-6 - with closing delay



IKON door closers are distinguished by their uniform appearance and the identical dimensions of model series T240 and T250 a. Uniform fixing points ensure that a firm mounting is achieved outside the fraem rebate (even without a mounting plate). The 14 mm height adjustment between the closer body and sliding rail is achieved by means of closer axis with variable height. The operating temperature range of the IKON door closer is yet another highlight: high-quality valves and hydraulic fluid achieve maximum locking stability. A high degree of user comfort, as all settings can be adjusted from the front.

Area of Application


This IKON door closer is suitable for internal and external DIN L/R single action doors that should be held open at times and are subject to extreme pressure and stress. Standard installation on the hinge side and overhead mounting on the side opposite the hinges. The door closer is suitable for leaf widths up to max. 1400 mm and operates within a temperature range of -25° to +45°.


ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

T013 Overhead door closer T241 with hold- open arm T401

Continuous closing force adjustment
range EN 2-6 - with closing delay

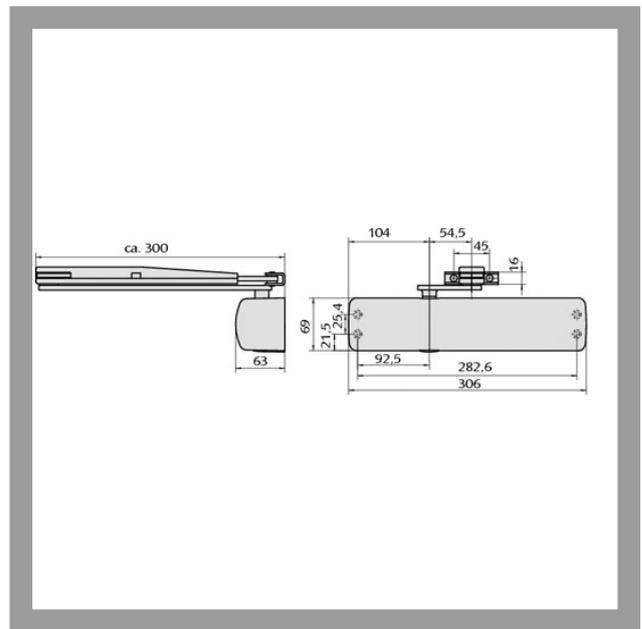

Product description

- Thermodynamic valves ensure consistent closing speed, latching force, backcheck and closing delay across entire temperature range from -25°C to +45°C
- 14mm continuous height adjustment between door closer and hold-open arm
- Mechanical hold-open function with on/off option integrated in arm system, hold-open bracket continuously adjustable up to max.150°
- Hydraulic latching force, backcheck and closing speed continuously adjustable from outset
- Closing delay also adjustable from front
- Effective ranges for backcheck, closing delay and latching force are adjustable
- Cast aluminium door closer body
- Modern design
- Universally suitable and removable cover made of high-quality plastic
- Standard finish silver, resembling to RAL 9006 (FB=SGR)
- Other colours: white, similar to RAL 9016 (FB=WS) and RAL colours of your choice

Accessories/Individual parts

- Lintel bracket T103
- Mounting plate T106
- Cover T107

Scope of delivery

- 1 overhead door closer T243 with closing delay
- 1 hold-open arm T401
- 1 drilling template
- fixing material



T013 Overhead door closer T241 with hold- open arm T401

Continuous closing force adjustment
range EN 2-6 - with closing delay

Article-No.	FB=	SVZ=	Artikel-Nr. Tuerschliesser=	Artikel-Nr. Armsystem=
T013 43377	SGR	DC	T243 41231	T401 41247
T013 43378	WS	DC	T243 41230	T401 41246
T013 43380	BN	DC	T243 43319	T401 41672
T013 R0001	RAL XXXX	DC	T243 R0002	T401 R0001



ASSA ABLOY
Sicherheitstechnik GmbH
Goerzallee 299
14167 Berlin
berlin@assaabloy.de
Tel. +4930 8106-0
Fax +4930 8106-26 00
www.assaabloy.de

ASSA ABLOY, the global leader
in door opening solutions