

T243,SVZ=DC Overhead door closer T243 with closing delay

Door closers

Overhead door closer

Can only be used in combination with compatible arm system



IKON door closers are distinguished by their compact design and their appearance adapted to match model series T240 and T250. The operating temperature range of the IKON door closer is yet another highlight: high-quality valves and hydraulic fluid achieve maximum locking stability. A high degree of user comfort, as all settings can be adjusted laterally.

Area of Application


IKON door closers are based on a system solution with a modular structure that makes planning, installation and handling easier than ever. The door closer range encompasses varied model versions in a uniform housing – thus lending door closing elements with different equipment and performance characteristics a uniform appearance. All versions can be mounted on both door sides. Perfectly-controlled closing forces ensure and especially high degree of accessing comfort, while clever functionality greatly facilitates height adjustment. And: IKON door closers function reliably and maintain a practically constant closing time across a broad temperature range from -25°C to $+45^{\circ}\text{C}$.


ASSA ABLOY

ASSA ABLOY, the global leader
in door opening solutions

T243,SVZ=DC Overhead door closer T243 with closing delay

Can only be used in combination with compatible arm system

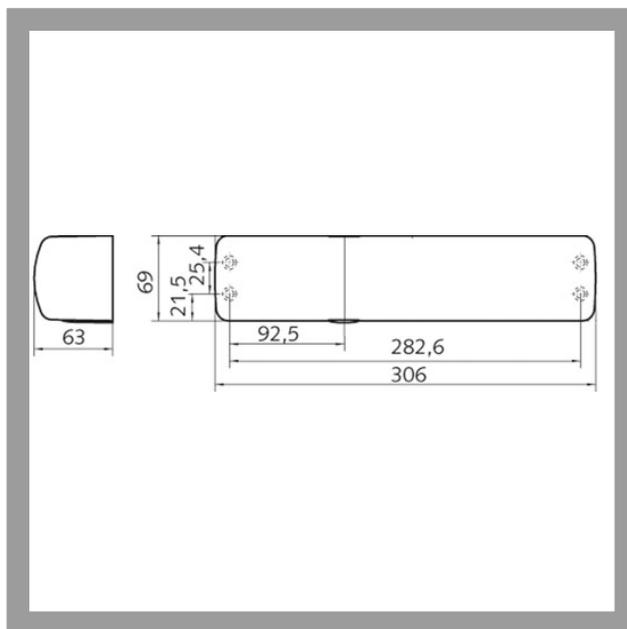

Product description

- Continuous closing force adjustment, range varies, depending on arm system used
- Range with standard arm / Hold-open arm EN 2-6
- Range with sliding rail EN 1-4
- Thermodynamic valves ensure consistent closing speed, latching force, backcheck and closing delay across entire temperature range from -25°C to +45°C
- 14mm continuous height adjustment between door closer and arm system
- Hydraulic latching force, backcheck and closing speed continuously adjustable from outset
- Closing delay (SVZ=DC) also adjustable from the front (not approved for use on fire doors)
- Effective ranges for backcheck, closing delay and latching force are adjustable
- Cast aluminium door closer body
- Modern design
- Universally suitable and removable cover made of high-quality plastic
- Standard finish silver, resembling to RAL 9006 (FB=SGR)
- Other colours: white, similar to RAL 9016 (FB=WS) and RAL colours of your choice

Accessories/Individual parts

- Standard arm special version T400,AUS=SPEZIAL
- Hold-open arm T401
- Sliding rail T450
- Sliding rail T461
- Lintel bracket T103
- Mounting plate T106
- Cover T107

Scope of delivery

- 1 Overhead door closer T243 without arm system and mounting plate



T243,SVZ=DC Overhead door closer T243 with closing delay

Can only be used in combination with
compatible arm system

Article-No.	FB=	SVZ=
T243 41231	SGR	DC
T243 41230	WS	DC
T243 43319	BN	DC
T243 R0002	RAL XXXX	DC



ASSA ABLOY
Sicherheitstechnik GmbH
Goerzallee 299
14167 Berlin
berlin@assaabloy.de
Tel. +4930 8106-0
Fax +4930 8106-26 00
www.assaabloy.de

ASSA ABLOY, the global leader
in door opening solutions